




# iRobot Roomba 655 Pet Series front wheel replacement or maintenance

You will be removing the back plate and the front caster wheel of your Roomba in order to clean it.

Written By: Rhett

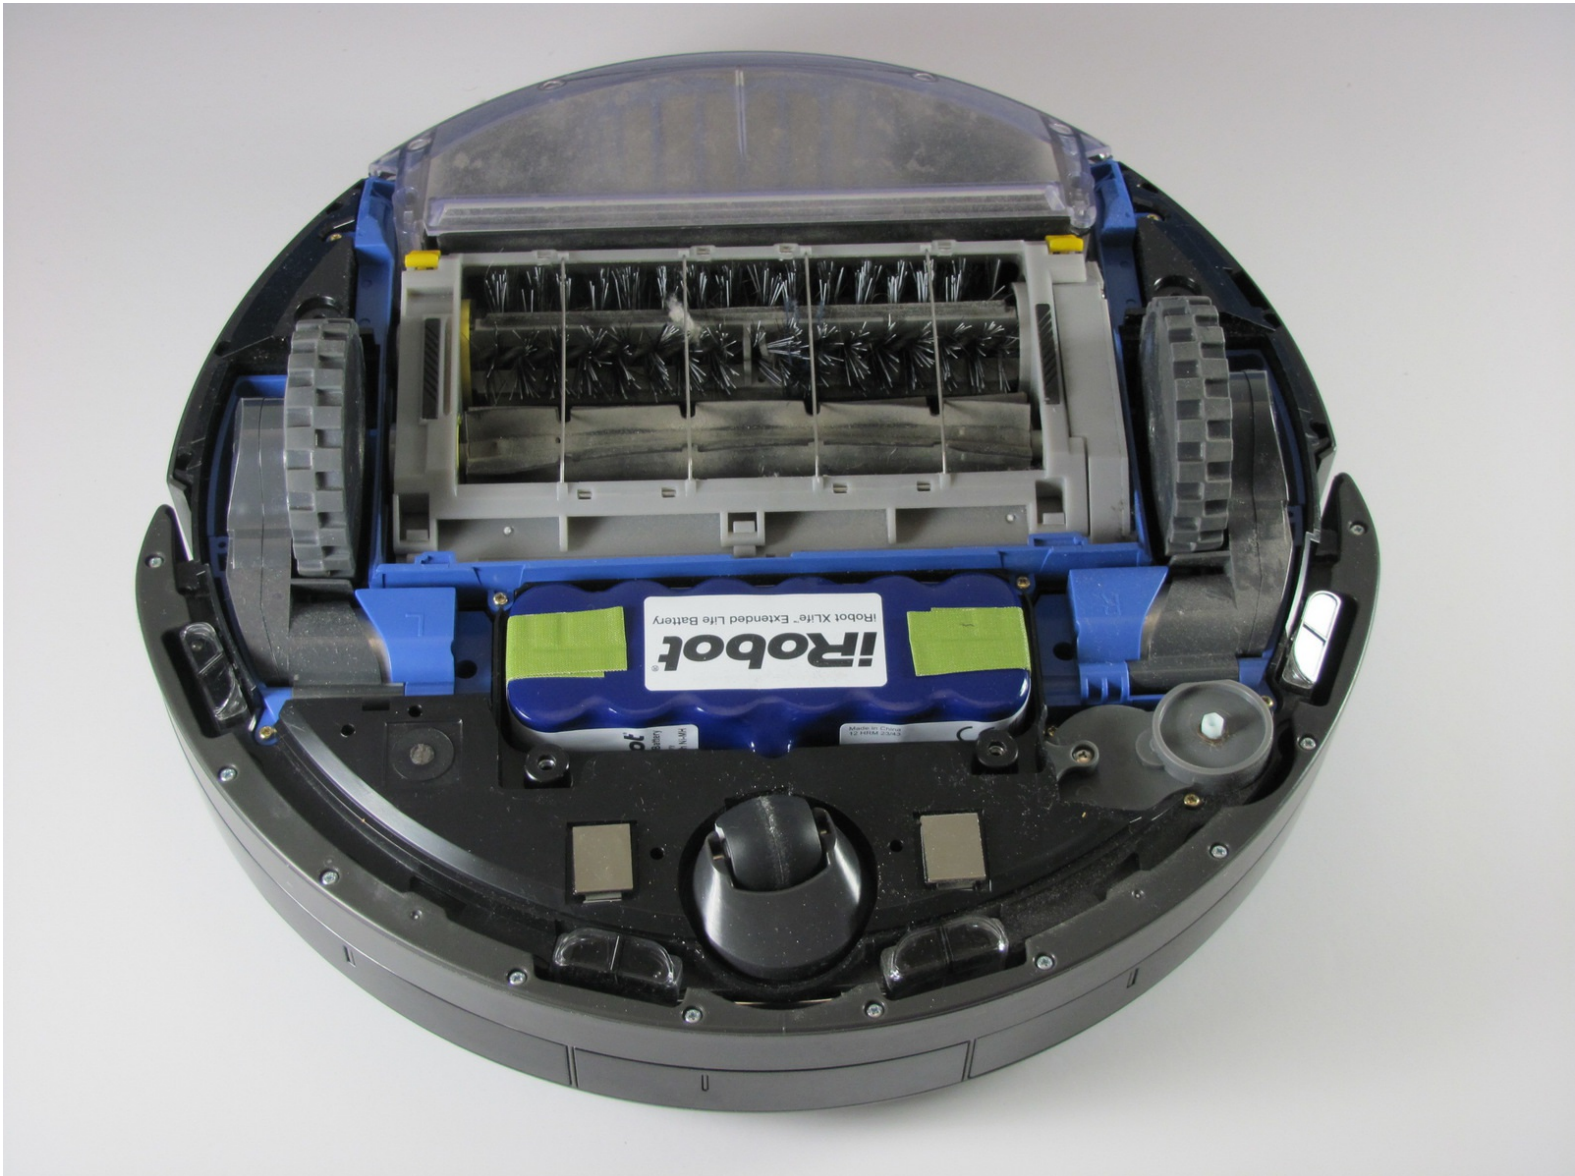

## INTRODUCTION



The front caster wheel of the Roomba vacuum cleaner runs over all debris that the cleaner picks up. This means it can get very dirty, very quickly. This guide shows you how to take the wheel out and clear it of debris.



### TOOLS:

- [Phillips #1 Screwdriver](#) (1)
  - [Phillips #2 Screwdriver](#) (1)
  - [Spudger](#) (1)
-


## Step 1 — Removing the Side Brush

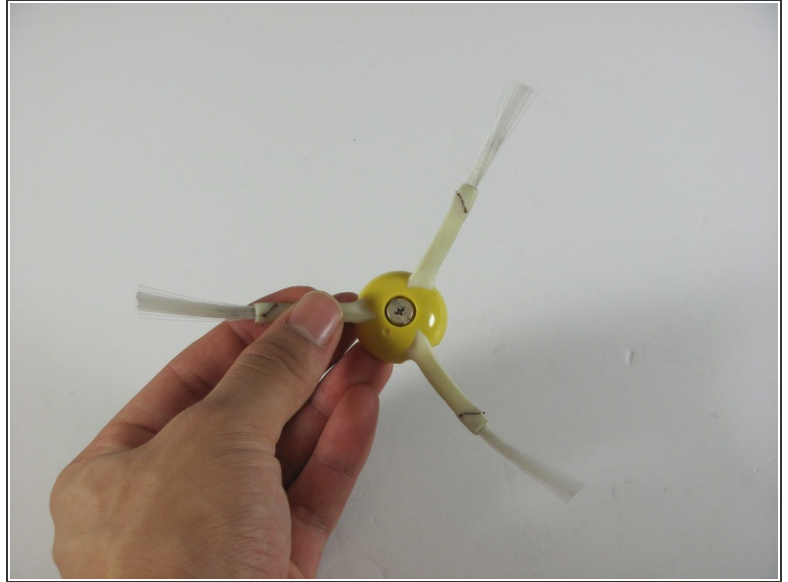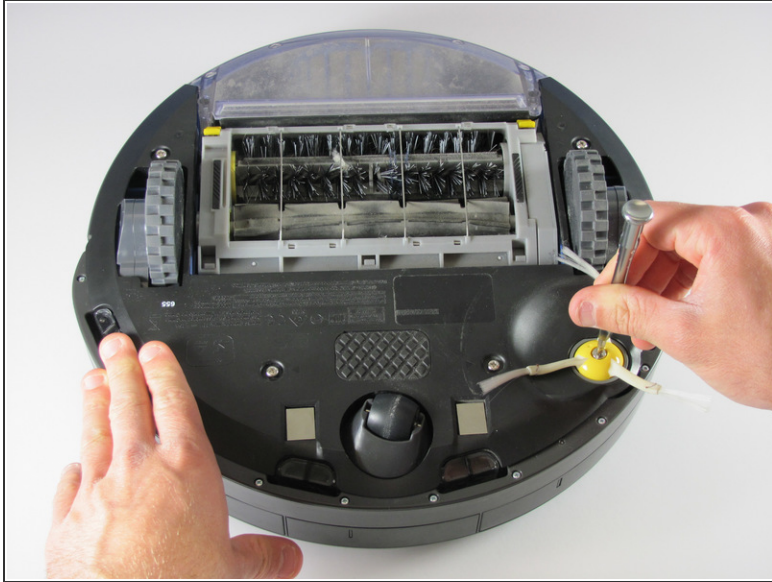

- Flip the device over onto its back
  - Unscrew the single screw that connects the side brush to brush motor using the Phillips head #2 screwdriver
- i** This screw does not come out of the yellow side brush*





## Step 2 — Removing the Back Panel

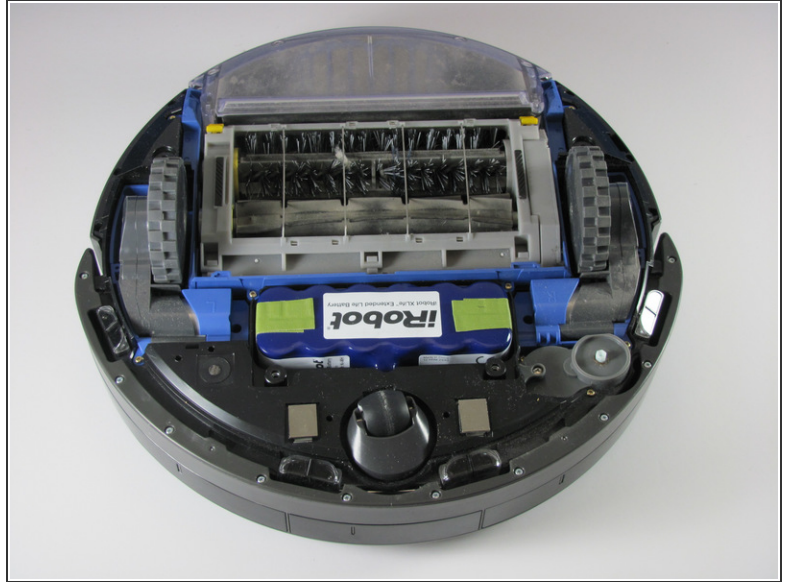

- Remove the four Phillips #1 screws on the back panel.
- Pop off the back plate once the screws are loose by gently prying away from the body
- ⓘ *The screws don't come completely out of the panel, but it will still come apart once unscrewed.*

## Step 3 — Removal of Caster Wheel Housing

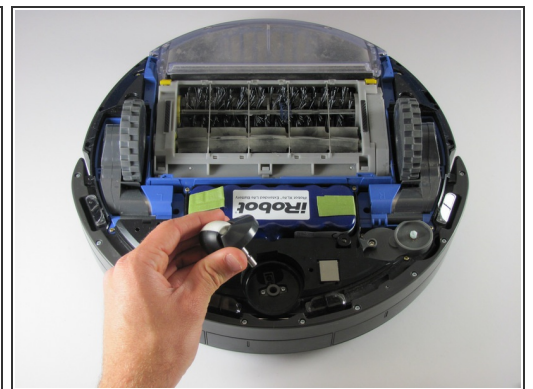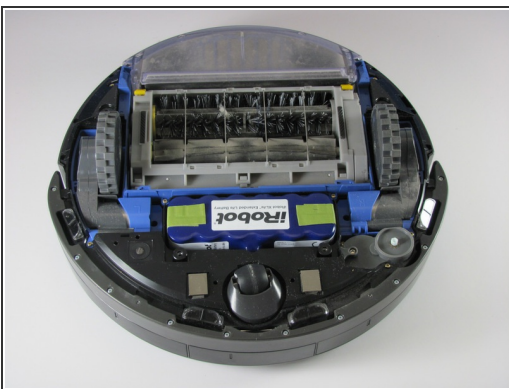

- With the robot still upside down hold the caster wheel housing steady.
- Insert plastic spudger under the wheel housing
- Apply force to pry the wheel **straight** up
- Remove the wheel housing from the robot

## Step 4 — Removing Wheel From Rotating Housing



- Firmly grip the wheel housing with one hand
- With the other hand push the wheel up and out of its slotted housing
- Clear the wheel of debris

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-22 12:50:26 AM.